




FC Power Source

Outdoor Power Supply

Supports up to 3 Float Controller SI
 or 1 Float Controller CI

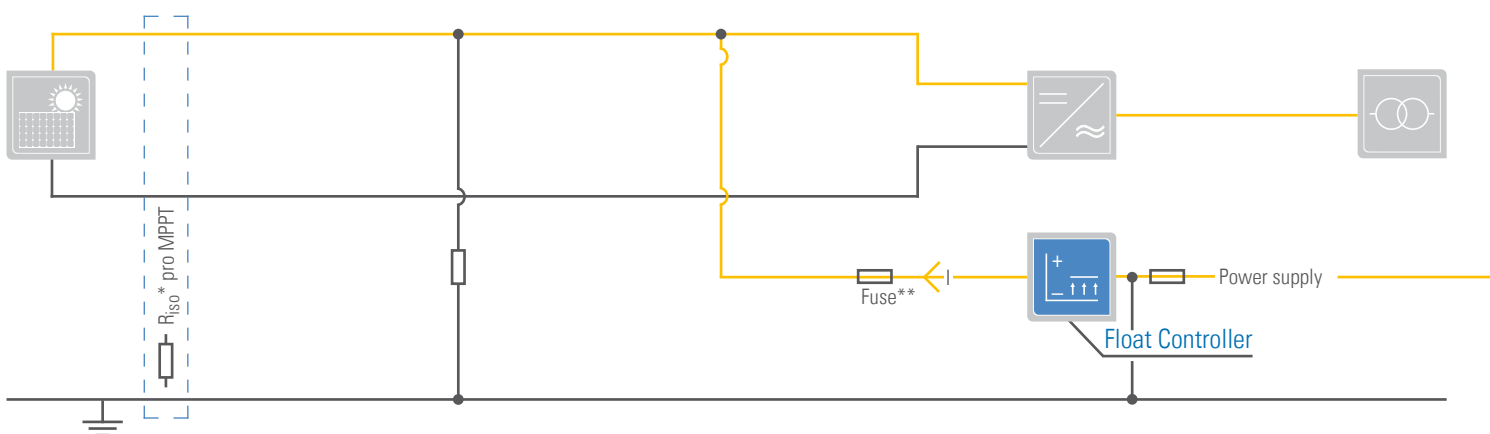

* Schematically illustrated insulation resistance

** No scope of supply / available as accessory

| General Information | |
|---|---|
| Material | Polycarbonat, halogenfree |
| Colour scheme | RAL 7035 (front transparent) |
| General Data Power supply | |
| Nominal input voltage range | 100 V AC ... 240 V AC |
| Input voltage range | 85 V AC ... 264 V AC, 95 V DC ... 250 V DC |
| AC frequency range | 45 Hz ... 65 Hz |
| DC frequency range | 0 Hz |
| Rated output voltage | 24 V DC \pm 1 % |
| Output voltage adjustment range | 22,5 V DC ... 29,5 V DC (> 24 V DC, power-constant limited) |
| Rated output current | 4,2 A (-25 °C ... 55 °C) |
| Output current I _{max} | 6,5 A |
| Output power | 100 W |
| Installation | |
| Installation | Wall mounting |
| Dimensions & Weight | |
| Dimensions (width/height/depth) | 163/163/120 mm (outside dimensions inkl. cap) |
| Weight | 2 kg |
| Input parameters | |
| Supply line | 1 x M16 |
| Output parameters | |
| Supply line | 3 x M16 |
| Standards | |
| CE | Conform |
| cULus | UL listed |
| Protection class and ambient conditions | |
| Protection class according to EN 60529 | IP 65 |
| Permissible ambient temperature | -25 °C bis +50 °C |
| Altitude above sea level | Max. 2.000 m |

IP 65 